

PVRES GENERAL	PVRES general.....	3
	Characteristic	4
	Electrical system	4
	Technical data.....	5
	Code numbers and weight	6
	Dimensions.....	6
PVRES ACCESSORIES	PVRES accessories	8
	Code numbers and weight	9
	Dimensions.....	9
PVREL GENERAL	PVREL general.....	11
	Characteristics	12
	Electrical system	13
	Electrical system PVREL.....	13
	Code numbers and weight	14
	Technical data.....	14
	Dimensions.....	15

© 2003 Sauer-Danfoss. All rights reserved. Printed in Europe
 Sauer-Danfoss accepts no responsibility for possible errors in catalogs, brochures and other printed material.
 Sauer-Danfoss reserves the right to alter its products without prior notice. This also applies to products
 already ordered provided that such alterations aren't in conflict with agreed specifications. All trademarks in
 this material are properties of their respective owners. Sauer-Danfoss and the Sauer-Danfoss logotype are
 trademarks of the Sauer-Danfoss Group.

Front cover illustrations: F300641,, F300642, F300141, F300142
 drawing: 155B577




GENERAL

PVRES can be used individually or with PVRES accessories built together to form a complete operating panel. PVRES is particularly suited to panel mounting and characterised by:

- finger-tip control
- small dimensions
- low weight
- built-in flow regulation
- accessories such as emergency stop and lamps (see page 8)


TWO PROPORTIONAL FUNCTIONS

PVRES is supplied with one or two potentiometers. It is thus possible to regulate one function, or two functions at the same time.




FLOWADJUSTMENT

Two further adjustments per function are built into PVRES. Independently of each other, these limit the signal voltage (U_s) and thereby the flow from proportional valve ports A and B without the movement of the remote control lever being limited. The oil flow can be infinitely reduced down to 25% of maximum flow.

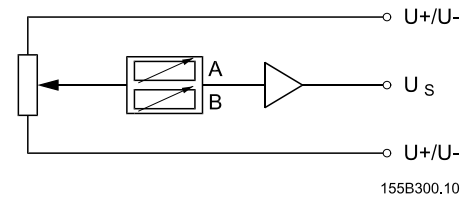


ON-OFF FUNCTION

Instead of the proportional functions, PVRES can be supplied with built-in switches. The contact functions can be either normally "ON" or normally "OFF" in neutral position.



CHARACTERISTIC

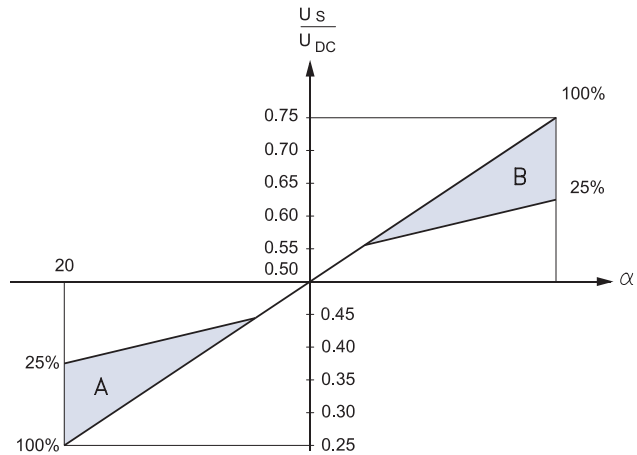

2 way	5.7 N [1.28 lbf]	1.7 N [0.38 lbf]	1.7 N [0.38 lbf]	5.7 N [1.28 lbf]
4 way	6.9 N [1.55 lbf]			6.9 N [1.55 lbf]

155B170.11



ELECTRICAL SYSTEM

*2 proportional functions
 without using neutral
 position switch*

*2 proportional functions
 with the use of neutral
 position switch*

---- Signal leads
 — Supply leads


- E: Emergency stop
 An emergency stop should be
 built into all electrical systems
- F: Lead from fault monitoring

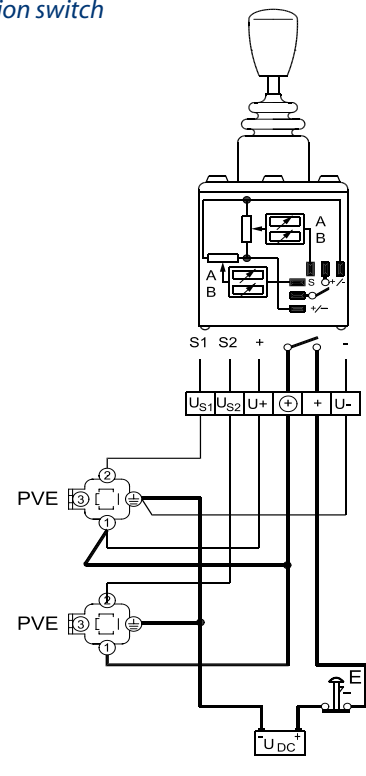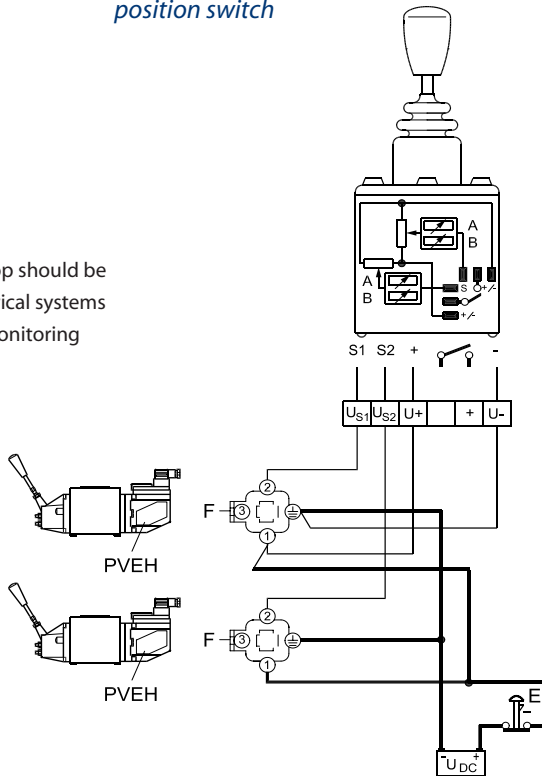

155B467.11

**ELECTRICAL SYSTEM
 CONTINUED**

On-off-on function

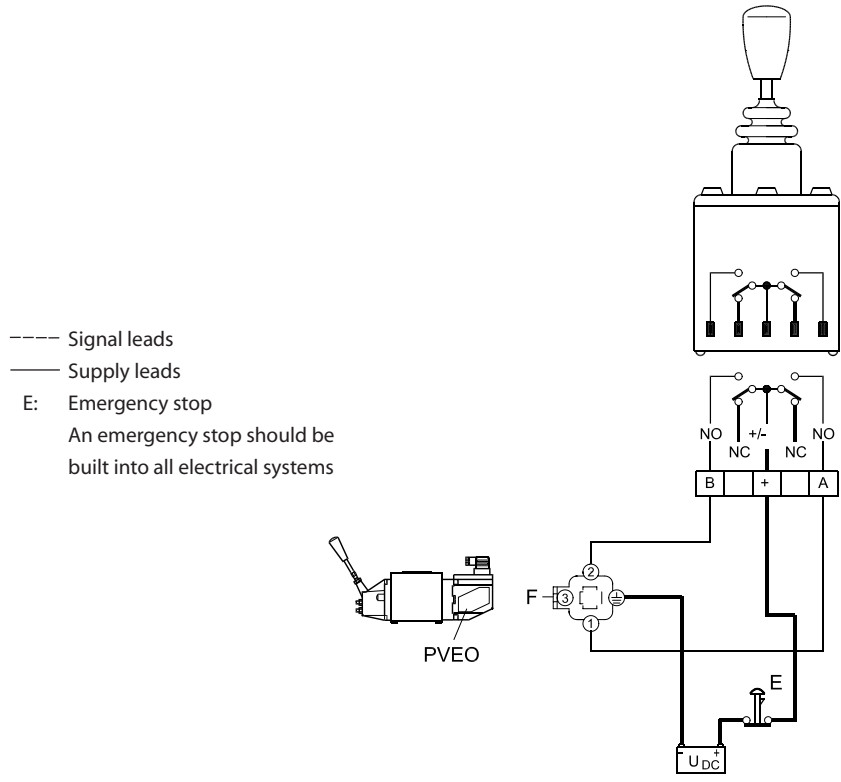





----- Signal leads
 ——— Supply leads
 E: Emergency stop
 An emergency stop should be built into all electrical systems

TECHNICAL DATA


Supply voltage	U_{DC}	11- 30 U_{DC}
	Max. ripple	5%
Current consumption		< 80 mA
Max. force		50 N [11.24 lbf]
Output voltage (U_s)	U_s	0,25 → 0,75
	U_{DC}	
Neutral voltage (U_s)	U_s	0,5
	U_{DC}	
Output signal	Max. load	Two parallel-connected PVEs
	Min. load impedance to $0,5 \cdot U_{DC}$	6 k Ω
Signal current max.	$U_{DC} = 12 V$	$\pm 0,6$ mA (resistive)
	$U_{DC} = 24 V$	$\pm 1,2$ mA
Neutral position switch max. current	$U_{DC} = 12 V$	2 A
	$U_{DC} = 24 V$	1 A
On - off - on switch max. current	$U_{DC} = 12 V$	0,7 A
	$U_{DC} = 24 V$	0,35 A
Ambient temperature		- 30 to + 60°C
Enclosure to IEC 529	Over mounting flange	IP 44
	Under mounting flange	IP 23

PVRE and PVRET must be connected to supply voltage at the same point as PVE.

CODE NUMBERS AND WEIGHT

Function	Symbol	Version	Code no	Dimension		Weight	
				mm	[in]	kg	[lb]
1 Proportional	 155B167.10	Standard	155B4210	40 x 80 x 192	[1.57 x 3.15 x 7.56]	0.27	[0.60]
		Short	155B4218	40 x 80 x 135	[1.57 x 3.15 x 5.31]	0.24	0.53]
1 Proportional	 155B168.10	Standard	155B4211	40 x 80 x 235	[1.57 x 3.15 x 9.25]	0.40	[0.88]
2 Proportional	 155B169.10	Standard	155B4212	80 x 80 x 192	[3.15 x 3.15 x 7.56]	0.38	[0.84]
		Short	155B4219	80 x 80 x 135	[3.15 x 3.15 x 5.31]	0.32	[0.70]
1 On - off - on	 155B367.10	Standard	155B4206	40 x 80 x 192	[1.57 x 3.15 x 7.56]	0.25	[0.55]




DIMENSIONS

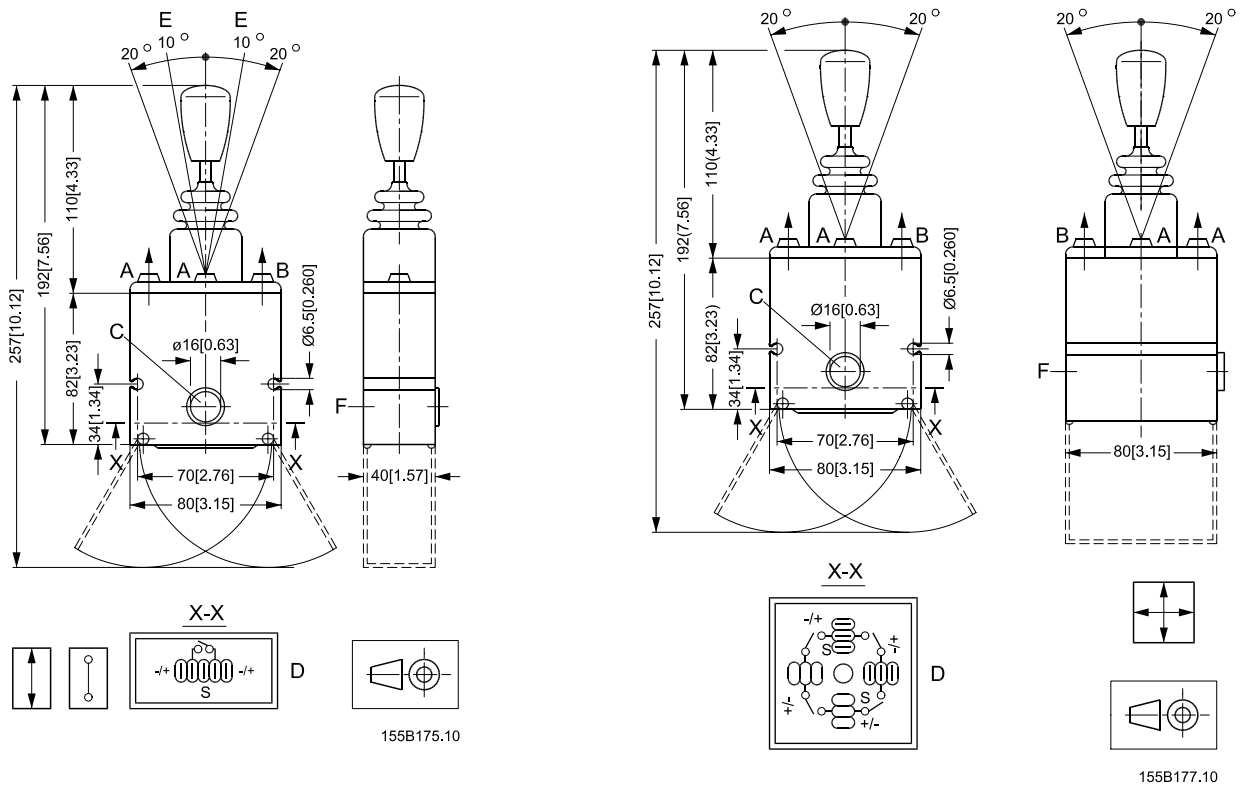


A, B : Oil flow adjustment
 C : Deflection block
 D : Flat pin A 6.3 - 0.8

E : Max. travel for on-off-on version
 F : $\phi 17$ hole for PG 11 screwed cable entry

DIMENSIONS

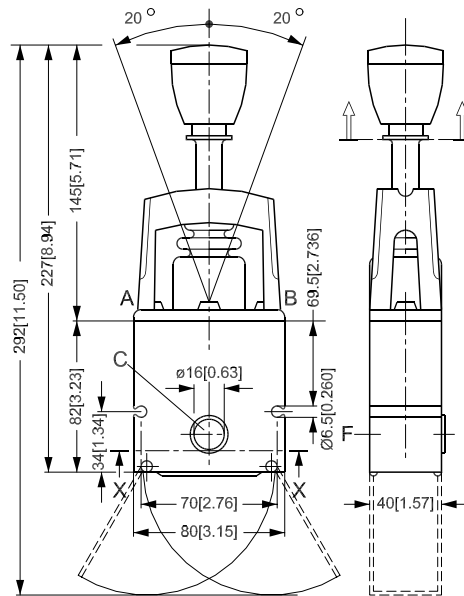


155B475.10



155B404.11

- A, B : Oil flow adjustment
- C : Deflection block
- D : Flat pin A 6.3 - 0.8
- E : Max. travel for on-off-on version
- F : $\varnothing 17$ hole for PG 11 screwed cable entry

GENERAL

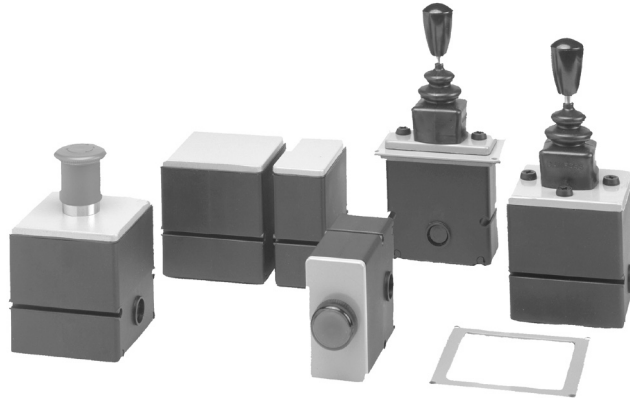

PVRES accessories meet the demand for simple installation, monitoring and safety. They also offer the possibility of mounting other components in connection with PVRES where uniform design is desirable.

EMERGENCY STOP MODULE

The module contains an emergency stop switch of the impact key type $I_{NOM} = 10 \text{ A}$



155B171.10

LAMP MODUL

The module contains a green lamp. 12 V and 24 V bulbs are included.



155B172.10

SPACING AND MOUNTING MODULES

The modules are used between PVRES remote control units either as empty spacer modules or as mounting modules for switches, lamp indicators, starting keys, etc. The modules are available in widths 40 mm and 80 mm.




155B173.10



155B174.10

PANEL MOUNTING RINGS


Panel mounting rings 40 mm and 80 mm are available for PVRES modules.



155B470.10





PG 11 SCREWED CABLE ENTRY

PG screwed cable entry and locknut, suitable for all PVRES modules.







155B473.10


CODE NUMBERS AND WEIGHT

Type	Code number	Dimension mm [in]	Weight kg [lb]
Lamp module	 155B4213 155B172.10	40 x 80 [1.57 x 3.15]	0,22 [0.48]
Emergency stop	 155B4216 155B171.10	80 x 80 [3.15 x 3.15]	0,33 [0.73]
Spacer and mounting module	 155B4214 155B173.10	40 x 80 [1.57 x 3.15]	0,15 [0.33]
	 155B4215 155B173.10	80 x 80 [3.15 x 3.15]	0,18 [0.40]
Panel mounting plate	155B4876	60 x 100 [2.36 x 3.94]	0,04 [0.09]
	155B4877	100 x 100 [3.94 x 3.94]	0,05 [0.11]
PG 11 screwed cable entry	155B4875		0,01 [0.02]


DIMENSIONS

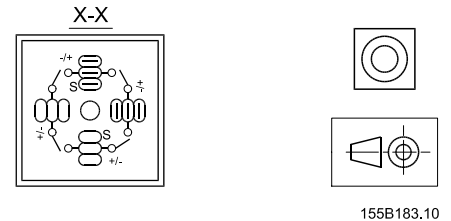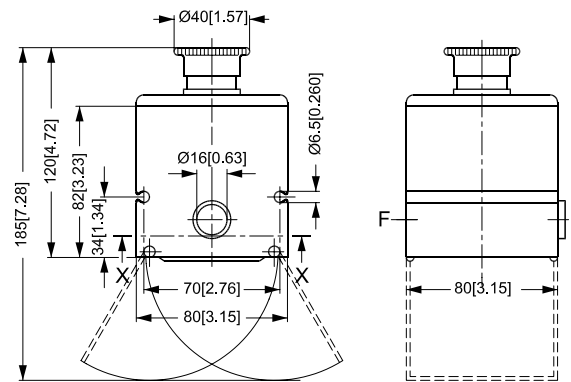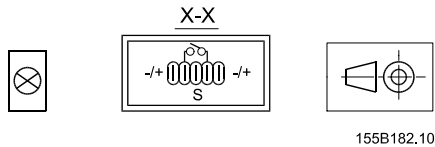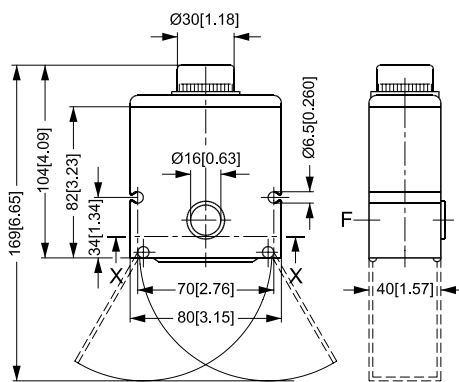

DIMENSIONS

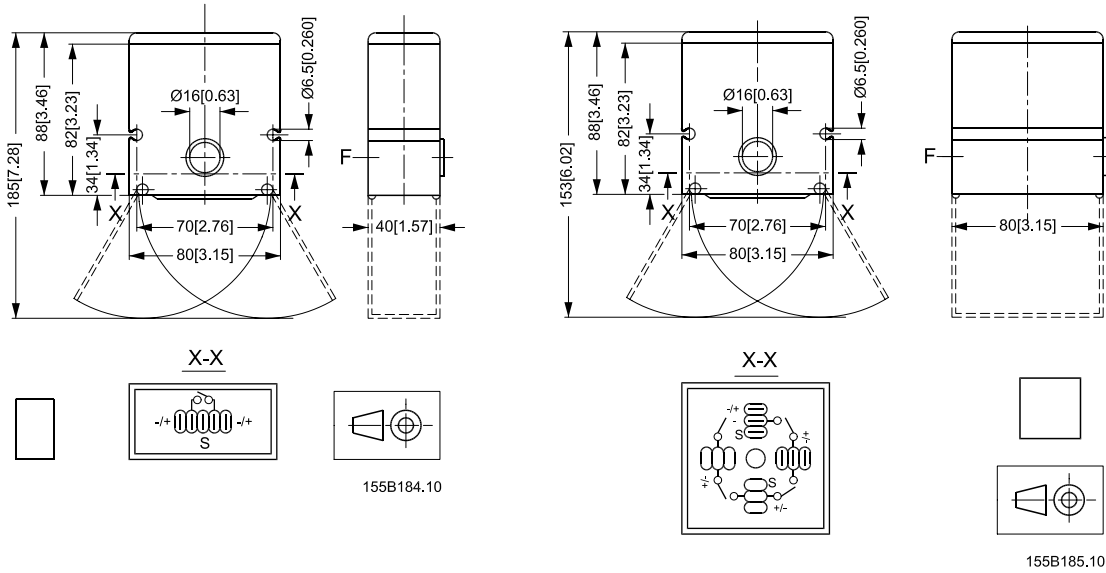

**PVRES PANEL MOUNTING
PLATE**

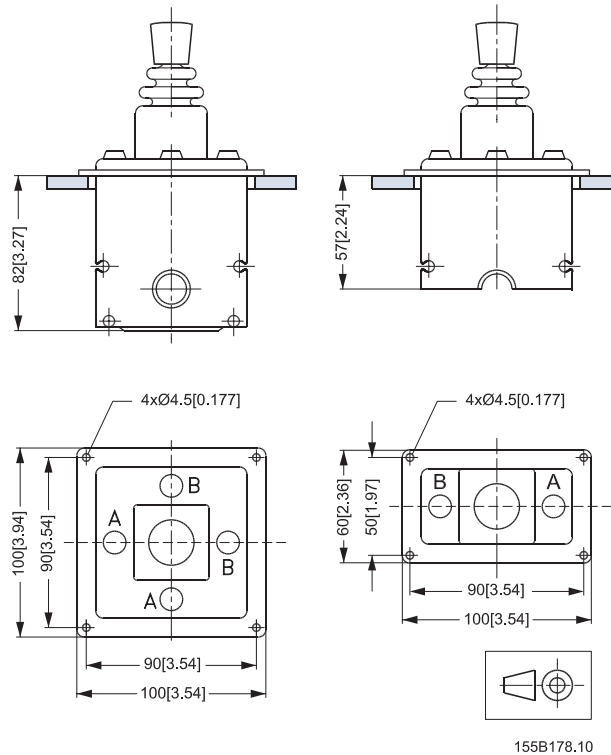


GENERAL



PVREL is an electric remote control lever made in weather-resistant plastic. PVREL is for easy mounting in operating panels. PVREL is characterised by:

- IP 67 enclosure
- low operating forces
- robust construction
- small dimensions

PROPORTIONAL FUNCTION



The PVREL remote control levers contains a potentiometer for the control of one proportional function.

VARIANTS

The PVREL series contains four variants. These can be ordered with or without neutral position switch.

STANDARD



Spring-centred remote control lever. PVREL series basic model.

155B167.10

HOLD FUNCTION



Spring-centred with hold function. The remote control lever functions as the basic model, but by rotating the top of the handle the centre position can be displaced and a constant control signal is given. The remote control lever can still be activated from its set centre position as normal, but when released will return to its set centre point.

155B343.10

NEUTRAL LOCK



Spring-centred with neutral position lock. The neutral position lock can be released by lifting the release ring under the handle. When the lever is returned to neutral position after manoeuvring, the neutral position lock will again engage.

155B344.10

FLOAT POSITION



Spring-centred with float position control. The remote control lever normally has proportional regulation in both directions, but with mechanical limitation in one direction to 3/4 of the normal activation range. The final 1/4 is used for float position control.

155B345.10


Access to the float position control is gained by lifting the release ring under the handle and moving the lever out to its float position. Here, on releasing the ring, the remote control lever becomes locked in float position. Return from float position is gained by again lifting the release ring and bringing the lever back to the proportional range.

INSTALLATION


Correctly placed, the PVREL can comply with the grade of enclosure IP 67 above the mounting flange.

CHARACTERISTIC


Signal (U_s) as a function of the lever angle

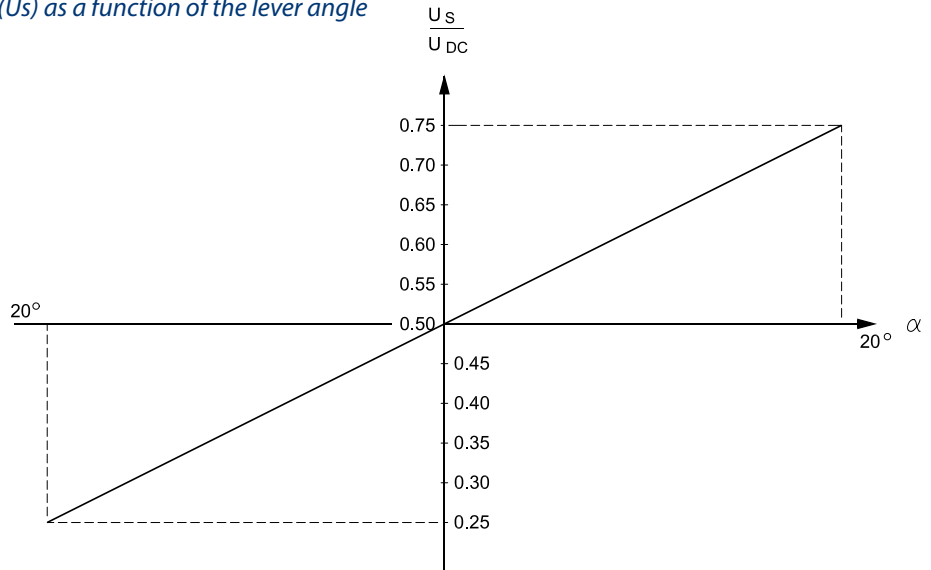

4.0 N [0.899 lbf]
 7.7 N [1.731 lbf]*



2.4 N [0.540 lbf]
 3.4 N [0.764 lbf]*




4.0 N [0.899 lbf]
 7.7 N [1.731 lbf]*


* PVREL with hold function

155B346.10

Float position

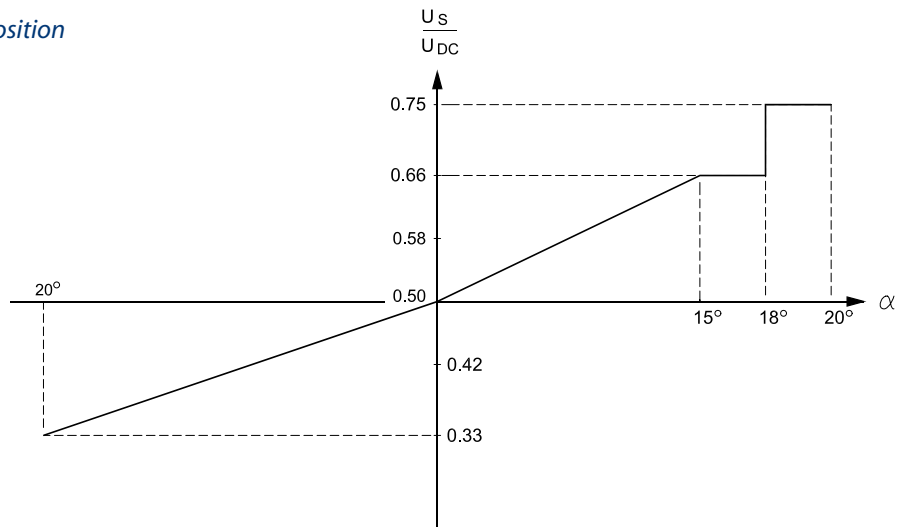


4.5 N
 [1.016 lbf]



2.4 N
 [0.540 lbf]



4.0 N
 [0.900 lbf]




4.5 N
 [1.016 lbf]

155B347.10

ELECTRICAL SYSTEM

*1 proportional function
 without using neutral
 position switch*

*1 proportional function
 with the use of neutral
 position switch*

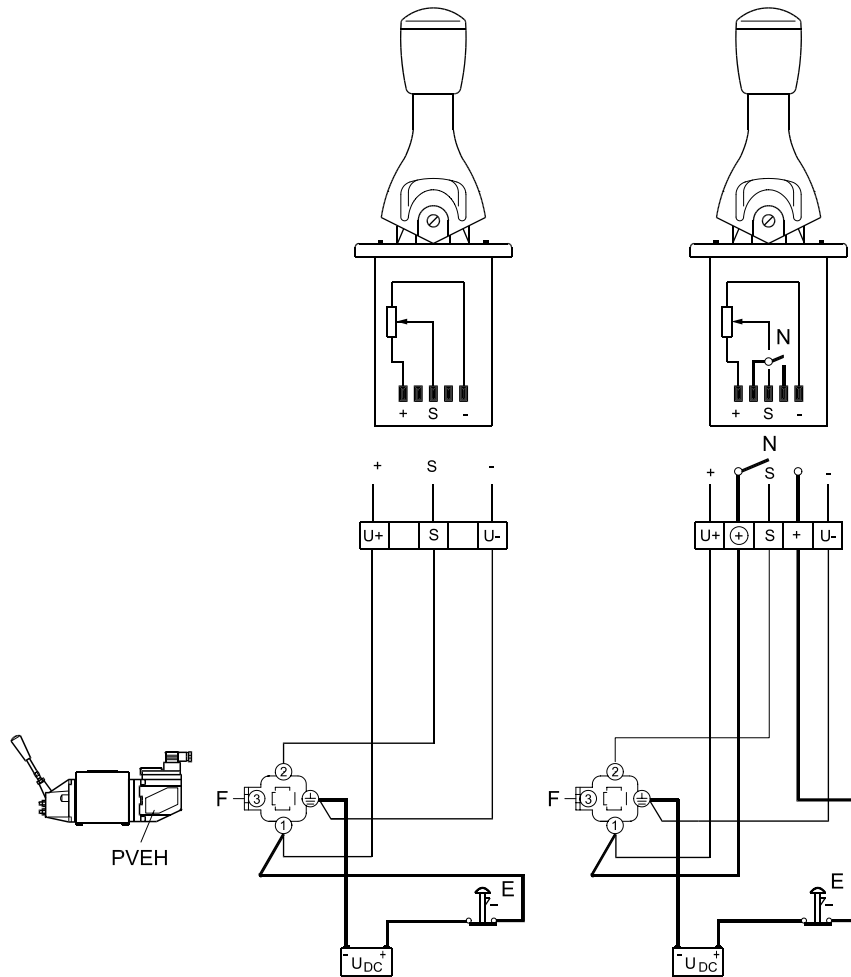





- Signal leads
- Supply leads
- E: Emergency stop
- F: Lead from fault monitoring

TECHNICAL DATA

Supply voltage	U_{DC}	11- 30 U_{DC}
	Max. ripple	5%
Current consumption		< 80 mA
Max. force		100 N [22.5 lbf]
Output voltage (U_s)	U_s	0,25 → 0,75
	U_{DC}	
Neutral voltage (U_s)	U_s	0,5
	U_{DC}	
Output signal	Max. load	Two parallel-connected PVEs
	Min. load impedance to $0,5 \cdot U_{DC}$	6 k Ω
Signal current max.	$U_{DC} = 12 V$	$\pm 0,6 mA$
	$U_{DC} = 24 V$	$\pm 1,2 mA$
Neutral position switch max. current	$U_{DC} = 12 V$	2 A
	$U_{DC} = 24 V$	1 A
Ambient temperature	- 30 to + 60°C [-22 to 140°F]	
Enclosure to IEC 529	Over mounting flange	IP 67
	Under mounting flange with bottom cover 155U2600	IP 65

PVREL must be connected to supply voltage at the same point as PVE.


CODE NUMBERS AND WEIGHT

Functions	Symbol	Code no. without neutral position switch	Code no. with neutral position switch	Weight kg [lb]
Spring centred	 155B342.10	155U2601	155U2605	0,32 [0.70]
With detent	 155B343.10	155U2602	155U2606	0,32 [0.70]
With neutral position lock	 155B344.10	155U2603	155U2607	0,36 [0.79]
For float position	 155B345.10	155U2604	155U2608	0,36 [0.79]

For installation, all PVREL remote control levers are supplied with O-rings and bolt sets. The bottom cover is not included in the above mentioned code number.

Accessories	Code no.	Weight kg [lb]
Bottom cover , including PG-screwed connections for IP 65 under the assembly flange	155U2600	0,025 [0,055]

DIMENSIONS

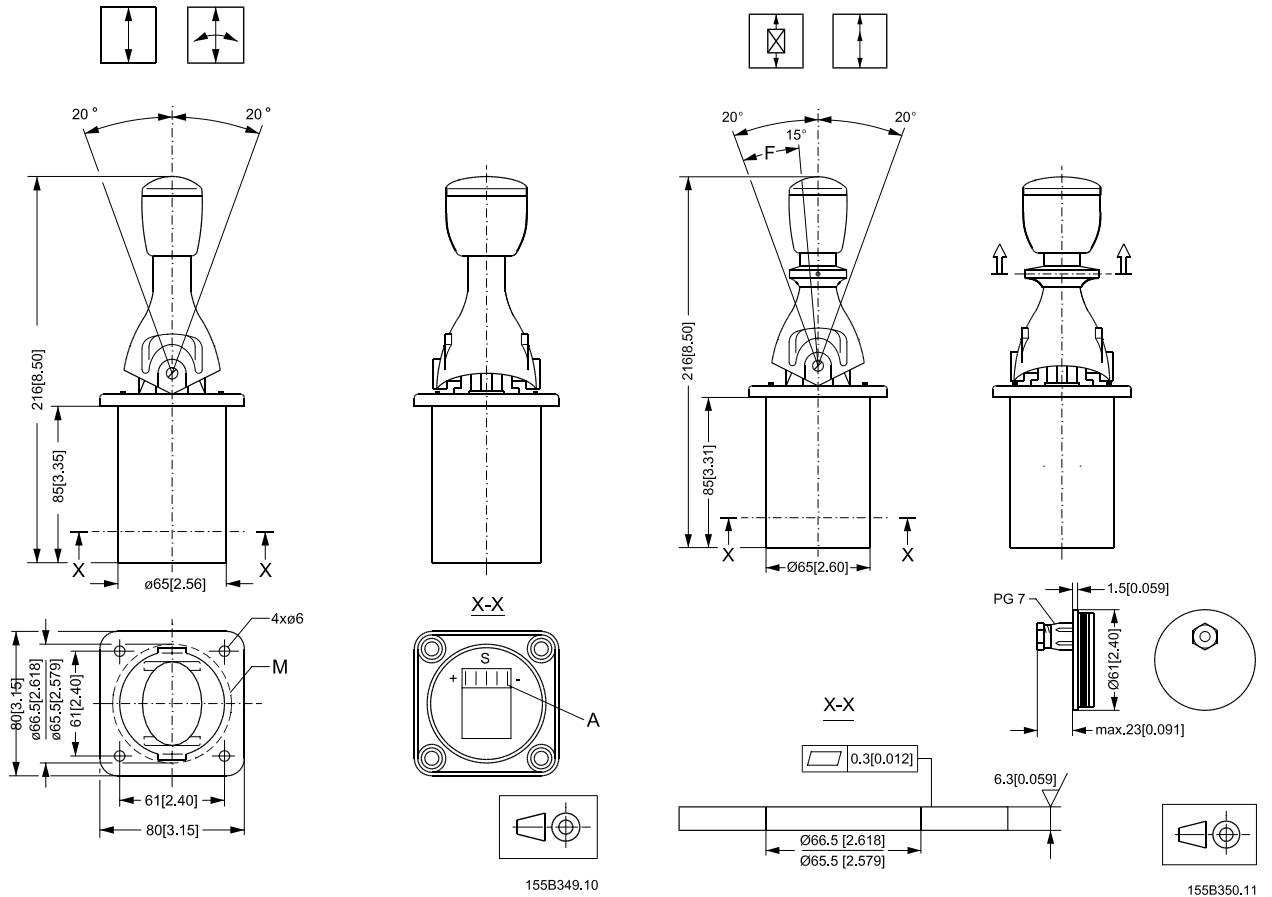

F : Float position
 A : Socket A 6,3-0,8
 M : Assembly aperture



OUR PRODUCTS

Hydrostatic transmissions
Hydraulic power steering
Electric power steering
Electrohydraulic power steering
Closed and open circuit axial piston pumps and motors
Gear pumps and motors
Bent axis motors
Orbital motors
Transit mixer drives
Planetary compact gears
Proportional valves
Directional spool valves
Cartridge valves
Hydraulic integrated circuits
Hydrostatic transaxles
Integrated systems
Fan drive systems
Electrohydraulics
Micro-controllers and software
Electric motors and inverters
Joysticks and control handles
Displays
Sensors

Sauer-Danfoss Mobile Power and Control Systems – Market Leaders Worldwide

Sauer-Danfoss is a comprehensive supplier providing complete systems to the global mobile market.

Sauer-Danfoss serves markets such as agriculture, construction, road building, material handling, municipal, forestry, turf care, and many others.

We offer our customers optimum solutions for their needs and develop new products and systems in close cooperation and partnership with them.

Sauer-Danfoss specializes in integrating a full range of system components to provide vehicle designers with the most advanced total system design.

Sauer-Danfoss provides comprehensive worldwide service for its products through an extensive network of Authorized Service Centers strategically located in all parts of the world.

Sauer-Danfoss (US) Company
2800 East 13th Street
Ames, IA 50010, USA
Phone: +1 515 239-6000, Fax: +1 515 239 6618

Sauer-Danfoss (Neumünster) GmbH & Co. OHG
Postfach 2460, D-24531 Neumünster
Krokamp 35, D-24539 Neumünster, Germany
Phone: +49 4321 871-0, Fax: +49 4321 871 122

Sauer-Danfoss ApS
DK-6430 Nordborg, Denmark
Phone: +45 7488 4444, Fax: +45 7488 4400