

Comatrol

RESPONSIVENESS IN MOTION

Member of the Danfoss Group



Pilot Operated Check Valves


www.comatrol.com


Pilot to Open	Model No.	Cavity	Description	Flow*	Pressure	Page
	RPC04	NCS04/3	Pilot Operated Check Valve, Pilot to Open	20.5 l/min [5.4 US gal/min]	350 bar [5075 psi]	PO - 7
	RPC06	NCS06/3		35 l/min [9.3 US gal/min]	350 bar [5075 psi]	PO - 8
	CP450-1	SDC10-3		30 l/min [8 US gal/min]	240 bar [3480 psi]	PO - 9
	RPC12	NCS12/3		90 l/min [23.8 US gal/min]	315 bar [4570 psi]	PO - 10


Pilot to Open	Model No.	Cavity	Description	Flow*	Pressure	Page
	CP458-2	SDC08-3	Pilot Operated Check Valve, Reverse Pilot to Open	20 l/min [5 US gal/min]	210 bar [3000 psi]	PO - 11
	MC10-RO	SDC10-3S		45 l/min [12 US gal/min]	250 bar [3600 psi]	PO - 12
	CP451-2	CP12-3S		95 l/min [25 US gal/min]	210 bar [3000 psi]	PO - 13
	CP452-2	SDC16-3S		130 l/min [34 US gal/min]	210 bar [3000 psi]	PO - 14
	CP453-2	CP20-3S		230 l/min [61 US gal/min]	210 bar [3000 psi]	PO - 15

Pilot to Open	Model No.	Cavity	Description	Flow*	Pressure	Page
	RPV 06	NCS06/4	Pilot Operated Check Valve, Pilot-to-open with drain	30 l/min [8 US gal/min]	315 bar [4500 psi]	PO - 16

* Flow ratings are based on a pressure drop of 7 bar [100 psi] unless otherwise noted. They are for comparison purposes only.

Symbol	Model No.	Cavity	Description	Flow*	Pressure	Page
	CP453-5	SDC20-2	Pilot Operated Check Valve, Reverse Pilot-to-open with vent	250 l/min [66 US gal/min]	350 bar [5075 psi]	PO - 17

Pilot to Close	Model No.	Cavity	Description	Flow*	Pressure	Page
	CP460-1	SDC10-3	Pilot Operated Check Valve, Pilot to Close	45 l/min [12 US gal/min]	210 bar [3000 psi]	PO - 18
	CP461-1	CP12-3S		115 l/min [30 US gal/min]	210 bar [3000 psi]	PO - 19
	CP462-1	SDC16-3S		190 l/min [50 US gal/min]	210 bar [3000 psi]	PO - 20

Dual Pilot-Operated Checks	Model No.	Cavity	Description	Flow*	Pressure	Page
	CP410-1	none	Pilot Operated Check Valve, Catalog HIC	80 l/min [21.1 US gal/min]	210 bar [3000 psi]	PO - 21

* Flow ratings are based on a pressure drop of 7 bar [100 psi] unless otherwise noted. They are for comparison purposes only.

MOTION CONTROL VALVES

Motion control valves, also referred to as load holding valves, are used to control the motion of a load in the following ways:

- Prevent a load from dropping in case of hose or tube failure.
- Prevent a load from drifting caused by directional control valve spool leakage.
- Provide smooth, modulated motion when the load is in a lowering or run-away mode.
- Provide smooth, modulated motion when the directional control valve is suddenly closed.

There are two basic types of motion control valves:

- Pilot-operated, or pilot-to-open check valves will satisfy the first two of the above requirements.
- Counterbalance valves will satisfy all four of the above requirements.


Pilot operated check valves




PILOT-OPERATED CHECK VALVES

Pilot-operated, or pilot-to-open check valves will positively hold a pressurized load and will release the load upon application of a pressure signal to the pilot port. Pilot-operated check valves are available as individual cartridges, standard **Cartridge-In-Body (CIB)** packages, or can be created in custom manifolds by using a standard check valve such as CV10-NP with a guided pilot piston. For more information on pilot pistons, see Accessories.

Individual cartridges

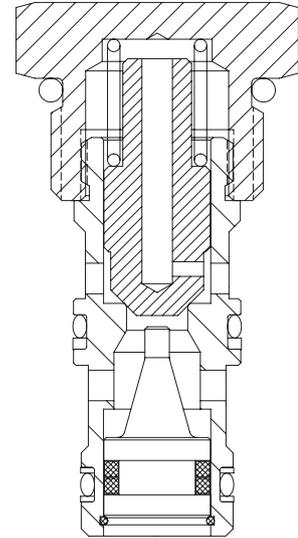


Cartridge in body

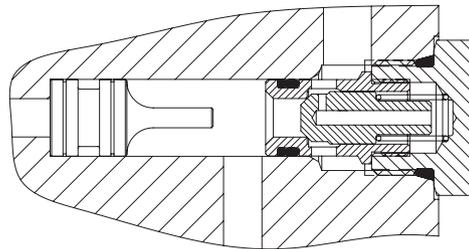

A typical circuit application for pilot-operated check valves contains a pump, directional control valve, and an actuator. Without a pilot-operated check valve the load will drift down due to spool leakage if the directional control valve is centered with the load raised. Additionally there is no protection against the load dropping in the event of hydraulic line failure. Adding a pilot-operated check valve helps prevent cylinder drift and provides protection against hose or tube failure. In this circuit, moving the directional control valve to the right causes the cylinder to extend. When the directional control valve is centered, the pilot-operated check valve will prevent leakage and lock the cylinder in position. Moving the directional control valve to the left sends pressure/flow to the rod end of the cylinder. This pressure also acts on the pilot piston to open the check valve and allow the load to be lowered.

Typical circuit application

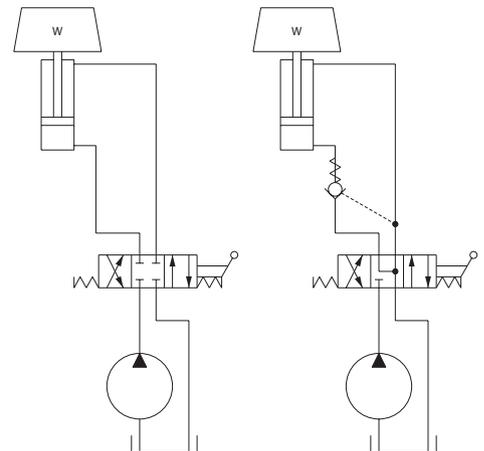

PILOT-OPERATED CHECK VALVES

(continued)

The pressure required to pilot open the check valve can be calculated by:

$$P = \frac{W + (P_c \cdot A_b)}{(A_b \cdot R) - A_r} \quad \text{cylinder retracts}$$

$$P = \frac{W + (P_c \cdot A_r)}{(A_r \cdot R) - A_b} \quad \text{cylinder extends}$$

W = Load

P_c = Check valve crack pressure (typically 0.34-4.5 bar [5-65 psi]; consult catalog sheets for details)

A_b = Cylinder bore area

A_r = Cylinder rod area

R = Check valve pilot ratio (typically 3:1 or 4:1; consult catalog sheets for details)


Note that these equations are idealized and do not consider any backpressure in the circuit, which is additive to the pressure required to pilot open the check valve.

Some additional guidelines for pilot-operated check valve applications:

- Use pilot-operated check valves for load holding, not for motion (speed) control. Pilot-operated check valves are on-off, non-modulating devices. Trying to use a pilot-operated check valve to control an overrunning load can result in severely unstable motion. For motion (speed) control of overrunning loads, use a counterbalance valve.

- Use caution when applying pilot-operated check valves to the rod end of a cylinder. Cylinders with large rod:bore diameter ratios may intensify rod pressure to a point where the required pilot pressure may be dangerously high—refer to the above equations. If intensification creates application concerns, consider using a counterbalance valve.

Closed center, directional control valves

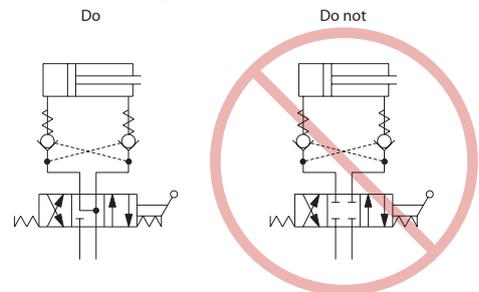


- Do not use pilot-operated check valves with closed-center, directional control valves. Pressure trapped between the directional control valve and the pilot-operated check valve can pilot the check valve open and result in undesired load motion.
- Locate pilot-operated check valves at or near the actuator to provide maximum load holding protection in the event of hydraulic line failure.

OPERATION


This is a pilot-to-open check valve.

Schematic



SPECIFICATIONS

Theoretical performance

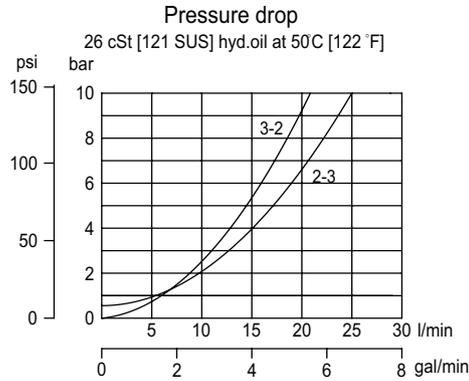

Specifications

Rated pressure*	350 bar [5075 psi]
Rated flow at 7 bar [100 psi]	20.5 l/min [5.4 US gal/min]
Weight	0.06 kg [0.13 lb]
Pilot ratio	3.2:1
Cavity	NCS04/3



*Rated Pressure based on NFPA fatigue test standard (at 1 million cycles)

Note: A piston seal requires a 5 bar [72.5 psi] or greater return spring.

DIMENSIONS

mm [in]

Cross-sectional view

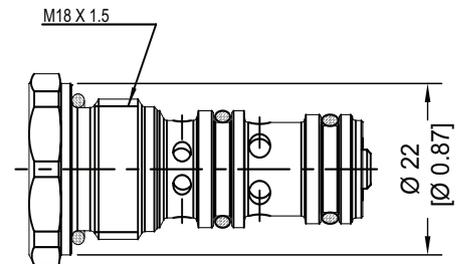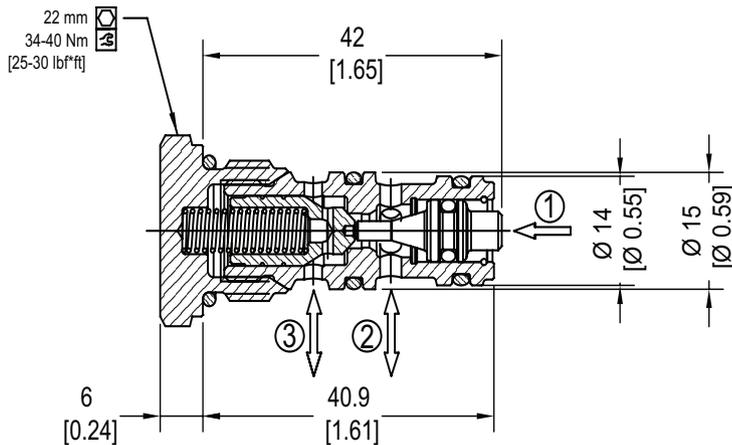

ORDERING INFORMATION

RPC04-2.5-OR-00-V

Pilot to Open

Crack Pressure	
0.5	0.5 bar [7 psi]
2.5	2.5 bar [36.25 psi]
5	5 bar [72.5 psi]
8	8 bar [116 psi]
15	15 bar [217.5 psi]

Pilot Seal Option

Omit	No seals
OR	Seals

Seal Option	Seal Kit
Omit = Buna-N	230000160
V = Viton	230000450

Code	Ports & Material	Body Nomenclature
00	00 = Cartridge only	No Housing
SE1/4	AL, 1/4 BSP	NCS04/3-SE-1/4
SE4S	AL, #4 SAE	NCS04/3-SE-4S
SE6S	AL, #6 SAE	NCS04/3-SE-6S


** Aluminum bodies are to be used for pressures less than 210 bar (3000 psi)

***Other housings available

OPERATION


This is a pilot-to-open check valve.

Schematic



SPECIFICATIONS

Theoretical performance

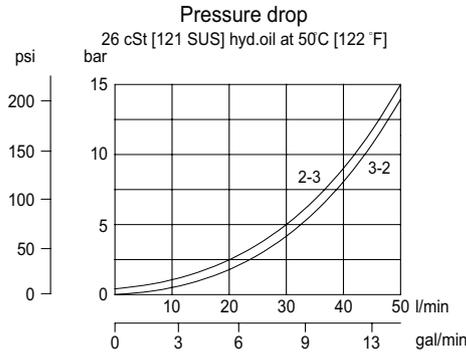

Specifications

Rated pressure*	350 bar [5075 psi]
Rated flow at 7 bar [100 psi]	35 l/min [9.25 US gal/min]
Weight	0.10 kg [0.22 lb]
Pilot ratio	3.4:1
Cavity	NCS06/3



*Rated pressure based on NFPA fatigue test standard (at 1 million cycles)

Note: A piston seal requires a 5 bar [72.5 psi] or greater return spring.

DIMENSIONS

mm [in]

Cross-sectional view

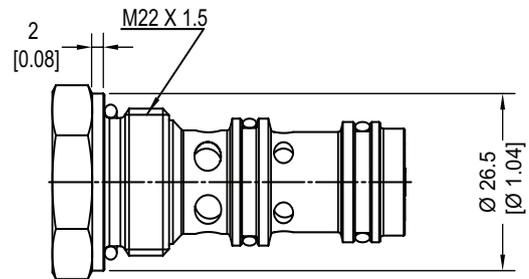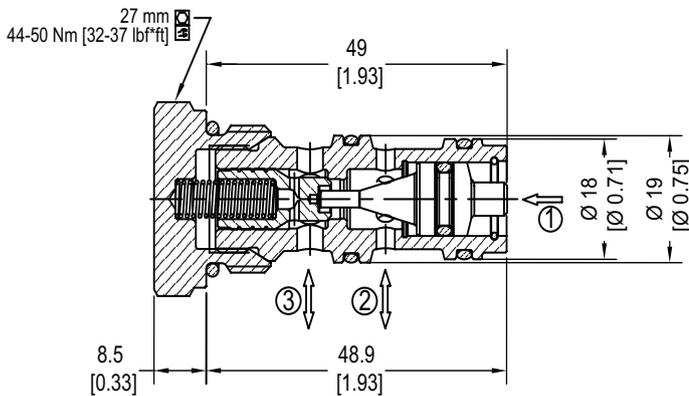

ORDERING INFORMATION

RPC06-5-OR-00-V

Pilot to Open

Crack Pressure	
0.5	0.5 bar [7 psi]
2	2 bar [30 psi]
5	5 bar [72.5 psi]
10	10 bar [145 psi]

Pilot Seal Option	
Omit	No seals
OR	Seals

Seal Option	Seal Kit
Omit = Buna-N	230000070
V = Viton	230000110

Code	Ports & Material	Body Nomenclature
00	00 = Cartridge only	No Housing
SE3/8	AL, 3/8 BSP	NCS06/3-SE-3/8
SE1/2	AL, 1/2 BSP	NCS06/3-SE-1/2
SE6S	AL, #6 SAE	NCS06/3-SE-6S
SE8S	AL, #8 SAE	NCS04/3-SE-8S


** Aluminum bodies are to be used for pressures less than 210 bar (3000 psi)
 *** Other housings available

PO - Pilot Operated Check Valves
 RPC 06

OPERATION


This valve is a pilot-to-open check valve.

Schematic



SPECIFICATIONS

Theoretical performance

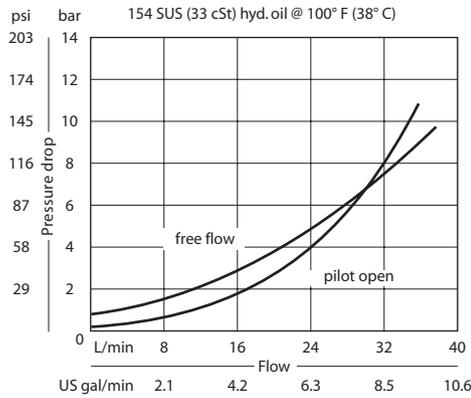

Specifications


Rated pressure	240 bar [3480 psi]
Rated flow at 7 bar [100 psi]	30 l/min [8 US gal/min]
Leakage	6 drops/min @ Rated pressure
Weight	0.09 kg [0.20 lb]
Pilot ratio	3.0:1
Cavity	SDC10-3

Note: A piston seal requires a 4.5 bar [65 psi] or greater return spring.

DIMENSIONS

mm [in]

Cross-sectional view

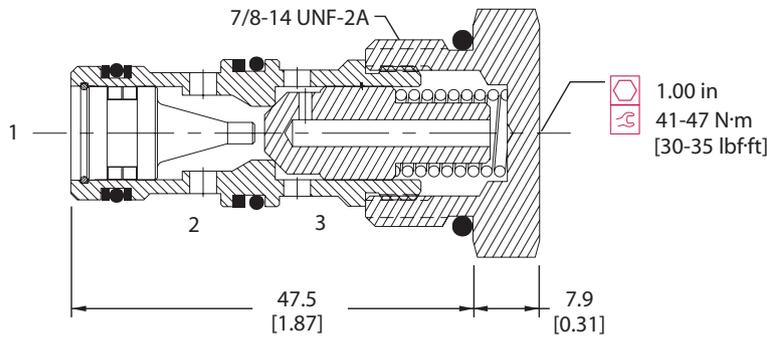

ORDERING INFORMATION


CP450 - 1 - B - 8S - 015 - 0

Seals	Seal kit 120570 120571	Piston seals 0 = No seals S = Seals included
Body and ports	Body P/N 0 = Cartridge No body 6S = Aluminum, #6 SAE CP10-3-6S 8S = Aluminum, #8 SAE CP10-3-8S SE3B = Aluminum, 3/8 BSP SDC10-3-SE-3B SE4B = Aluminum, 1/2 BSP SDC10-3-SE-4B	Cracking Pressure bar [psi] 065 = 4.48 [65] 115 = 7.90 [115] 200 = 13.8 [200] 315 = 21.8 [315]

OPERATION


This is a pilot-to-open check valve.

Schematic



SPECIFICATIONS

Theoretical performance

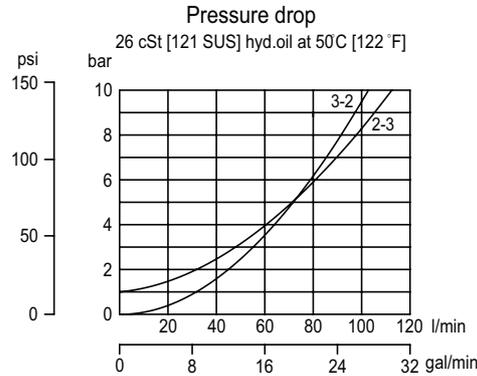

Specifications


Rated pressure	315 bar [4570 psi]
Rated flow at 7 bar [100 psi]	90 l/min [23.8 US gal/min]
Weight	0.20 kg [0.44 lb]
Pilot ratio	2.8:1
Cavity	NCS12/3

Note: A piston seal requires a 5 bar [72.5 psi] or greater return spring.

DIMENSIONS

mm [in]

Cross-sectional view

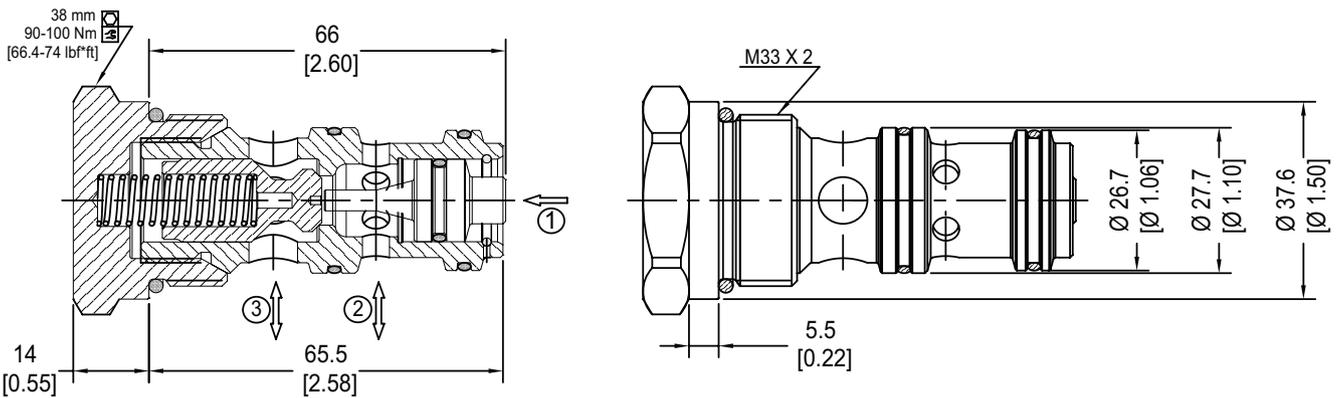

ORDERING INFORMATION

RPC12-5-OR-00-V

Pilot to Open

Crack Pressure	
0.5	0.5 bar [7 psi]
2.5	2.5 bar [36.2psi]
5	5.0 bar [72.5 psi]
10	10 bar [145 psi]

Pilot Seal Option	
Omit	No Seals
OR	Seals

Seal Option	Seal Kit
Omit = Buna-N	230000130
V = Viton	230000360

Code	Ports & Material	Body Nomenclature
00	00 = Cartridge only	00 = Cartridge only
SE1/2	AL, 1/2 BSP	NCS12/3-SE-1/2
SE3/4	AL, 3/4 BSP	NCS12/3-SE-3/4
SE8S	AL, #8 SAE	NCS12/3-SE-8S
SE12S	AL, #12 SAE	NCS12/3-SE-12S


**Aluminum bodies are to be used for pressures less than 210 bar (3000 psi)
 ***Other housings available

PO - Pilot Operated Check Valves
 RPC 12

OPERATION


This valve is a pilot-to-open check valve.

Schematic



SPECIFICATIONS

Theoretical performance

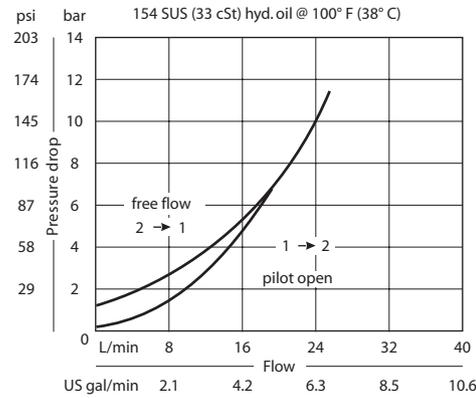

Specifications


Rated pressure	210 bar [3000 psi]
Rated flow at 7 bar [100 psi]	20 l/min [5 US gal/min]
Leakage	6 drops/min @ Rated pressure
Weight	0.07 kg [0.15 lb]
Pilot ratio	2.8:1
Cavity	SDC08-3

Note: A piston seal requires a 4.5 bar [65 psi] or greater return spring.

DIMENSIONS

mm [in]

Cross-sectional view

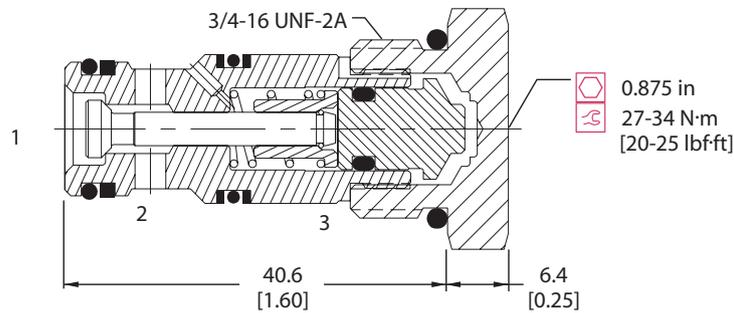

ORDERING INFORMATION


CP458 - 2 - B - 6S - 065 - 0

Seals B = Buna-N V = Viton	Seal kit 120250 120253	Piston seals 0 = No seals S = Seals included
Housing and ports 0 = No Housing SE2B = Al, 1/4 BSP SE3B = Al, 3/8 BSP 4S = Al, #4 SAE 6S = Al, #6 SAE Other housings available	Housing P/N No Housing SDC08-3-SE-2B SDC08-3-SE-3B CP08-3-4S CP08-3-6S	Crack Pressure bar [psi] 065 = 4.48 [65]

OPERATION


This is a pilot-to-open check valve.

Schematic



SPECIFICATIONS

Theoretical performance

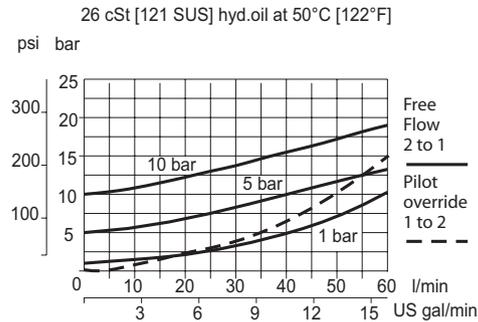

Specifications


Rated pressure	250 bar [3600 psi]
Rated flow at 7 bar [100 psi]	45 l/min [12 US gal/min]
Leakage	6 drops/min @ Rated pressure
Weight	0.12 kg [0.26 lb]
Pilot ratio	3.0:1
Cavity	SDC10-3S

Note: A piston seal requires a 4.5 bar [65 psi] or greater return spring.

DIMENSIONS

mm [in]

Cross-sectional view

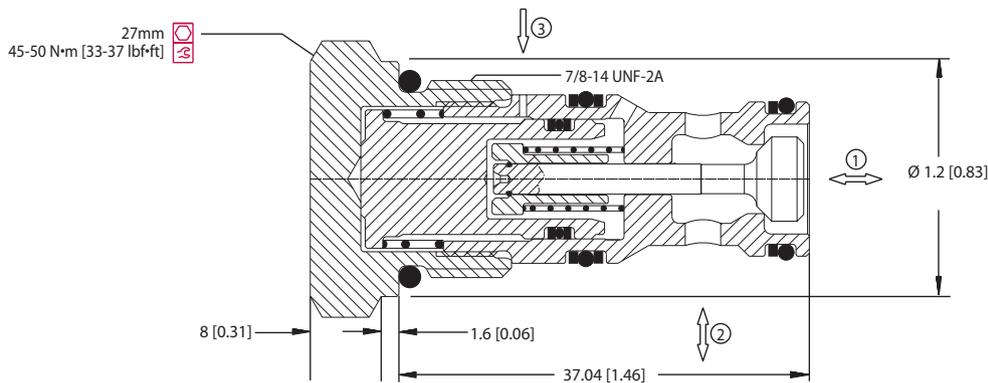

P103 753

ORDERING INFORMATION


MC10-RO-5-OR-A-B-6S

Crack Pressure	1 = 1 bar [15 psi]	5 = 5 bar [73 psi]	10 = 10 bar [145 psi]
Piston seals	Omit = No seal	OR = Seals included	
Housing and ports	00 = No Housing	SE3B = Al, 3/8 BSP	SE4B = Al, 1/2 BSP
	6S = Al, #6 SAE	8S = Al, #8 SAE	
	Other housings available		
Seals	B = Buna-N	V = Viton	
Seal kit	35401419		
Housing P/N	No Housing	SDC10-3S-SE-3B	SDC10-3S-SE-4B
		SDC10-3S-6S/6S	SDC10-3S-8S/6S

OPERATION


This valve is a pilot-to-open check valve.

Schematic



SPECIFICATIONS

Theoretical performance

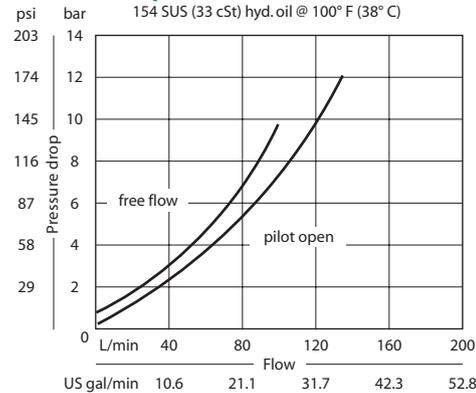

Specifications


Rated pressure	210 bar [3000 psi]
Rated flow at 7 bar [100 psi]	95 l/min [25 US gal/min]
Leakage	6 drops/min @ Rated pressure
Weight	0.21 kg [0.46 lb]
Pilot ratio	3:1
Cavity	CP12-3S

Note: A piston seal requires a 4.5 bar [65 psi] or greater return spring.

DIMENSIONS

mm [in]

Cross-sectional view

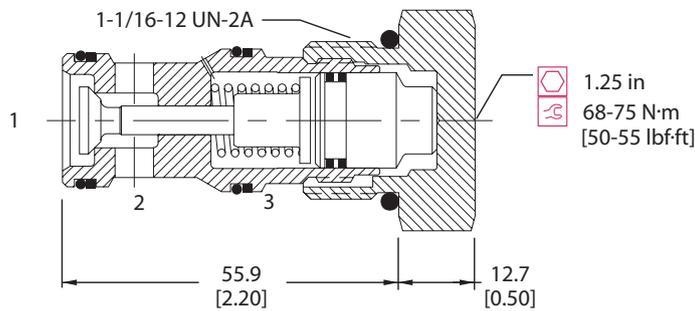

ORDERING INFORMATION


CP451 - 2 - B - 12S - 065 - 0

Seals	Seal kit 120204 120205	Piston seals 0 = No seals S = Seals included
B = Buna-N V = Viton	Housing and ports 0 = No Housing 4B = Al, 1/2 BSP 6B = Al, 3/4 BSP 10S = Al, #10 SAE 12S = Al, #12 SAE Other housings available	Crack Pressure bar [psi] 065 = 4.48 [65]
	Housing P/N No Housing CP12-3S-4B/2B CP12-3S-6B/2B CP12-3S-10S/4S CP12-3S-12S/4S	

OPERATION


This valve is a pilot-to-open check valve.

Schematic



SPECIFICATIONS

Theoretical performance

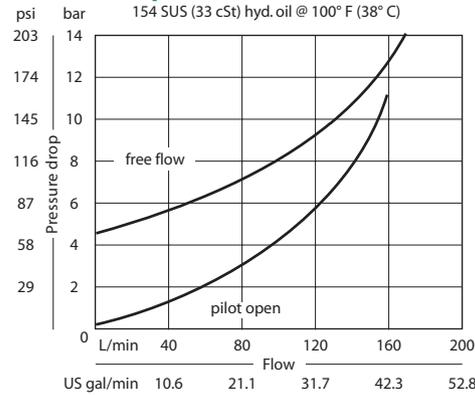

Specifications


Rated pressure	210 bar [3000 psi]
Rated flow at 7 bar [100 psi]	130 l/min [34 US gal/min]
Leakage	6 drops/min @ Rated pressure
Weight	0.29 kg [0.64 lb]
Pilot ratio	3:1
Cavity	SDC16-3S

Note: A piston seal requires a 4.5 bar [65 psi] or greater return spring.

DIMENSIONS

mm [in]

Cross-sectional view

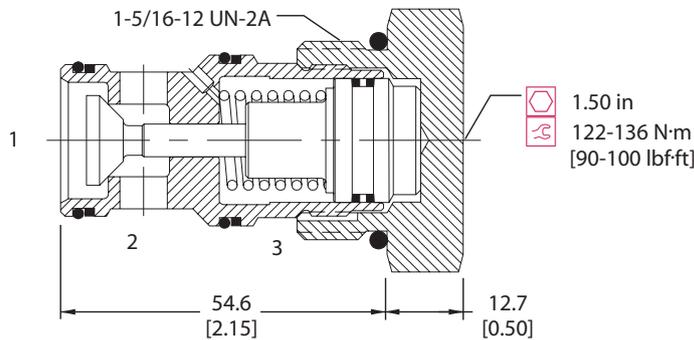

PO - Pilot Operated Check Valves
CP452-2

ORDERING INFORMATION

CP452-2 - B - 16S - 065 - 0

Seal Option

Code	Seal Material	Seal kit
B	Buna	120033
V	Viton	120034

Piston Seals

Code	
0	No seals
S	Seals Included

Housings & Ports	Housing P/N
0: Cartridge Only	No Housing
6B: 3/4 BSP, AL	CP16-3S-6B/2B
8B: 1 BSP, AL	CP16-3S-8B/2B
12S: #12 SAE, AL	CP16-3S-12S/4S
16S: #16 SAE, AL	CP16-3S-16S/4S

Other Housings available


Crack Pressure

Code	bar	[psi]
065	4.48	[65]

OPERATION


This valve is a pilot-to-open check valve.

Schematic



SPECIFICATIONS

Theoretical performance

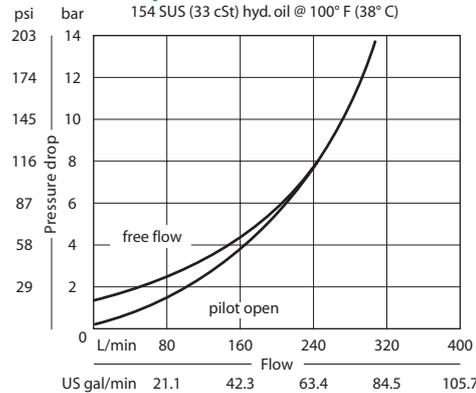

Specifications


Rated pressure	210 bar [3000 psi]
Rated flow at 7 bar [100 psi]	230 l/min [61 US gal/min]
Leakage	6 drops/min @ Rated pressure
Weight	0.66 kg [1.46 lb]
Pilot ratio	3:1
Cavity	CP20-3S

Note: A piston seal requires a 4.5 bar [65 psi] or greater return spring.

DIMENSIONS

mm [in]

Cross-sectional view

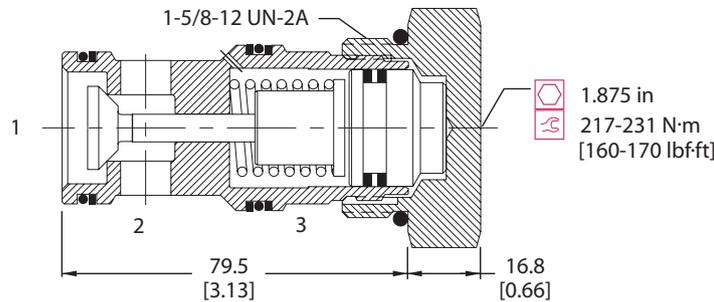

ORDERING INFORMATION


CP453 - 2 - B - 20S - 065 - 0

Seals B = Buna-N V = Viton	Seal kit 120380 120381	Piston seals 0 = No seals S = Seals included
Housing and ports 0 = No Housing 8B = Al, 1 BSP 10B = Al, 1-1/4 BSP 16S = Al, #16 SAE 20S = Al, #20 SAE Other housings available	Housing P/N No Housing CP20-3S-8B/2B CP20-3S-10B/2B CP20-3S-16S/4S CP20-3S-20S/4S	Crack Pressure bar [psi] 065 = 4.48 [65]

OPERATION


This is a pilot-to-open check valve with an internal drain.

Schematic



SPECIFICATIONS

Theoretical performance

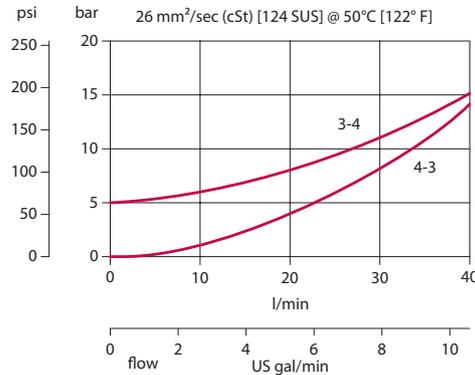

Specifications


Rated pressure	315 bar [4500 psi]
Rated flow at 7 bar [100 psi]	30 l/min [8 US gal/min]
Weight	0.13 kg [0.29 lb]
Pilot ratio	3.4:1
Cavity	NCS06/4

Note: A piston seal requires a 4.5 bar [65 psi] or greater return spring.

DIMENSIONS

mm [in]

Cross-sectional view

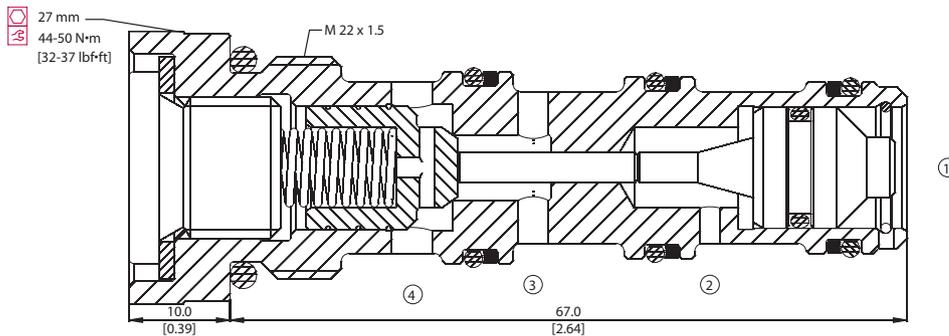

ORDERING INFORMATION

RPV 06 - 5 - OR - 00 - V

Piston seals
 OR = Seals
 Omit = No seals

Housing and ports
 00 = No Housing
 L3/8 = AL, 3/8 BSP
 L3/4 = AL, 3/4 BSP
 L6S = AL, #6 SAE
 L8S = AL, #8 SAE
 Other housings available

Seals
 V = Viton
 Omit = Buna-N


Seal Kit
 Consult factory
 230000080

Housing P/N
 No Housing
 NCS06/4-L-3/8
 NCS06/4-L-1/2
 NCS06/4-L-6S
 NCS06/4-L-8S

OPERATION


This is a pilot-to-open check valve with an external pilot connection.

Schematic



SPECIFICATIONS

Theoretical performance

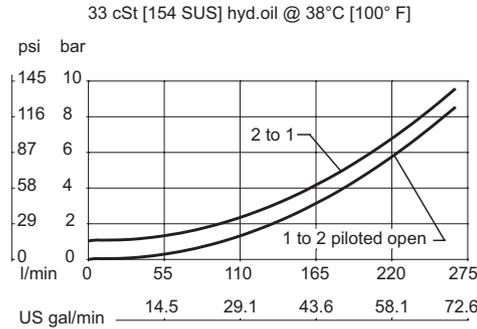

Specifications


Rated pressure	350 bar [5075 psi]
Rated flow at 7 bar [100 psi]	250 l/min [66 US gal/min]
Leakage	6 drops/min @ Rated pressure
Weight	1.23 kg [2.71 lb]
Pilot ratio	4:1
Cavity	SDC20-2

Note: A piston seal requires a 4.5 bar [65 psi] or greater return spring.

DIMENSIONS

mm [in]

Cross-sectional view

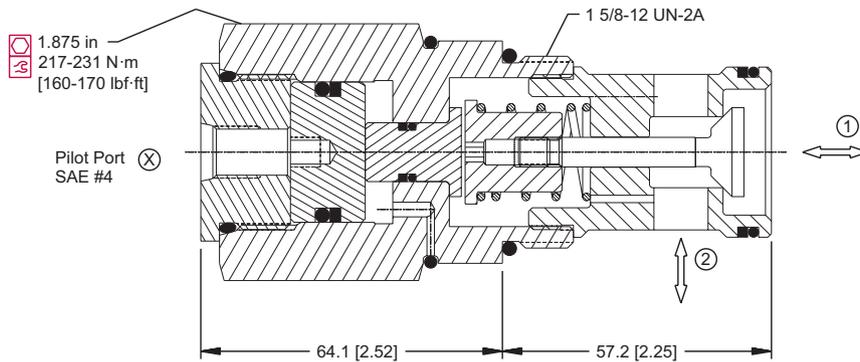

ORDERING INFORMATION


CP453-5-B-16S-4-065

Seals	Seal kit		Crack Pressure
B = Buna-N V = Viton	120011 120012		bar [psi] 065 = 4.3 65 100 = 6.9 100
Housing and ports		Housing P/N	Pilot ratio
0 = No Housing 8B = AL, 1 BSP 10B = AL, 1-1/4 BSP 16S = AL, #16 SAE 20S = AL, #20 SAE Other housings available		No Housing CP20-2-8B CP20-2-10B CP20-2-16S CP20-2-20S	4 = 4:1

OPERATION


This valve is a pilot-to-close check valve.

Schematic



SPECIFICATIONS

Theoretical performance

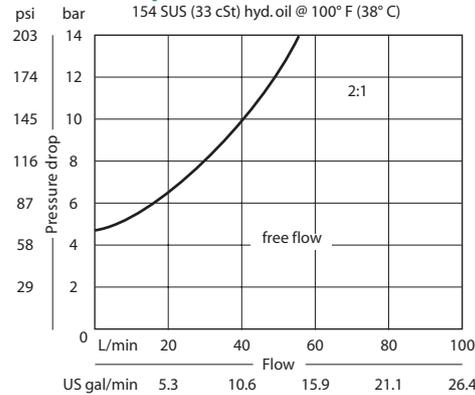

Specifications


Rated pressure	210 bar [3000 psi]
Rated flow at 7 bar [100 psi]	22 l/min [5.8 US gal/min]
Leakage	6 drops/min @ Rated pressure
Weight	0.10 kg [0.21 lb]
Pilot ratio	2:1
Cavity	SDC10-3

Note: A piston seal requires a 4.5 bar [65 psi] or greater return spring.

DIMENSIONS

mm [in]

Cross-sectional view

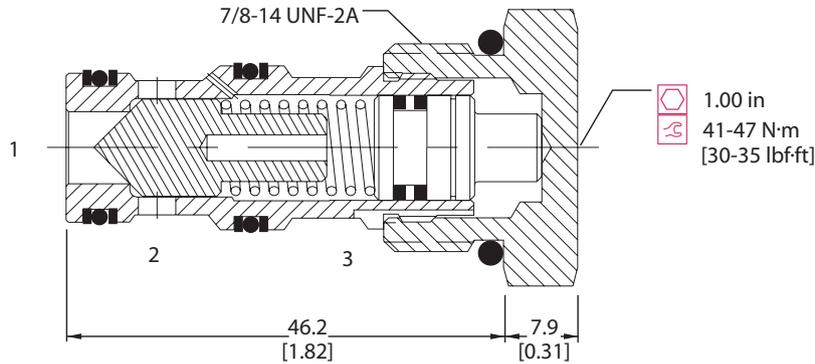

ORDERING INFORMATION

CP460 - 1 - B - 8S - 2 - 065 - 0


Seals	Seal kit	Piston seals	0 = No seals
B = Buna-N	120009	S = Seals included	
V = Viton	120010		
Housing and ports	Housing P/N	Crack Pressure	bar [psi]
0 = No Housing	No Housing	065 = 4.48	[65]
SE3B = Al, 3/8 BSP	SDC10-3-SE-3B		
SE4B = Al, 1/2 BSP	SDC10-3-SE-4B	Pilot ratio	
6S = Al, #6 SAE	CP10-3-6S	2 = 2:1	
8S = Al, #8 SAE	CP10-3-8S		

Other housings available

OPERATION


This valve is a pilot-to-close check valve.

Schematic



SPECIFICATIONS

Theoretical performance

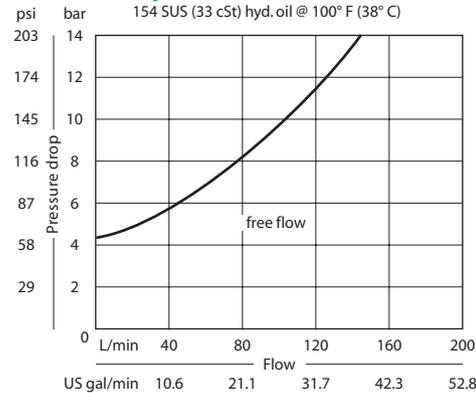

Specifications


Rated pressure	210 bar [3000 psi]
Rated flow at 7 bar [100 psi]	60 l/min [16 US gal/min]
Leakage	6 drops/min @ Rated pressure
Weight	0.21 kg [0.47 lb]
Pilot ratio	2.3:1
Cavity	CP12-3S

Note: A piston seal requires a 4.5 bar [65 psi] or greater return spring.

DIMENSIONS

mm [in]

Cross-sectional view

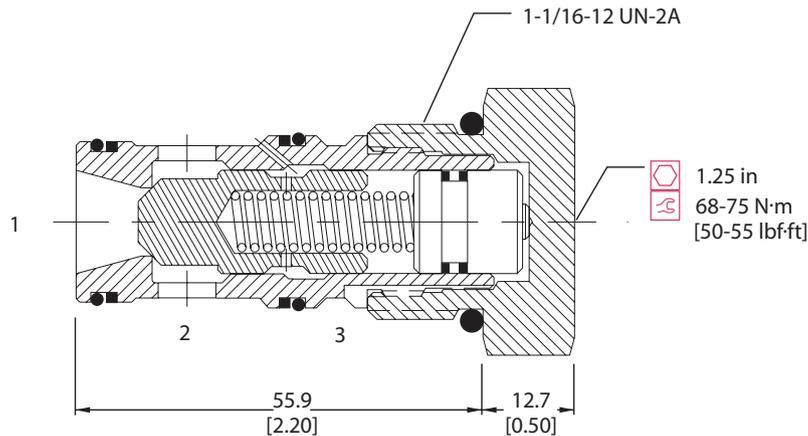

ORDERING INFORMATION

CP461 - 1 - B - 12S - 065 - 0

Seals		Piston seals	
B = Buna-N	Seal kit 120335	0 = No seals	
V = Viton	Seal kit 120336	S = Seals included	
Housing and ports	Housing P/N	Crack Pressure	
0 = No Housing	No Housing	bar [psi]	
4B = Al, 1/2 BSP	CP12-3S-4B/2B	065 = 4.48 [65]	
6B = Al, 3/4 BSP	CP12-3S-6B/2B		
10S = Al, #10 SAE	CP12-3S-10S/4S		
12S = Al, #12 SAE	CP12-3S-12S/4S		


Other housings available

PO - Pilot Operated Check Valves
CP461-1

OPERATION


This valve is a pilot-to-close check valve.

Schematic



SPECIFICATIONS

Theoretical performance

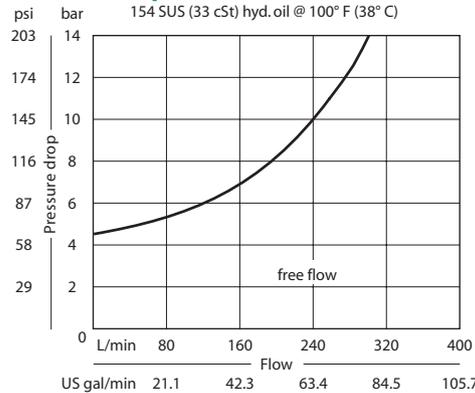

Specifications


Rated pressure	210 bar [3000 psi]
Rated flow at 7 bar [100 psi]	190 l/min [50 US gal/min]
Leakage	6 drops/min @ Rated pressure
Weight	0.29 kg [0.64 lb]
Pilot ratio	2.3:1
Cavity	SDC16-3S

Note: A piston seal requires a 4.5 bar [65 psi] or greater return spring.

DIMENSIONS

mm [in]

Cross-sectional view

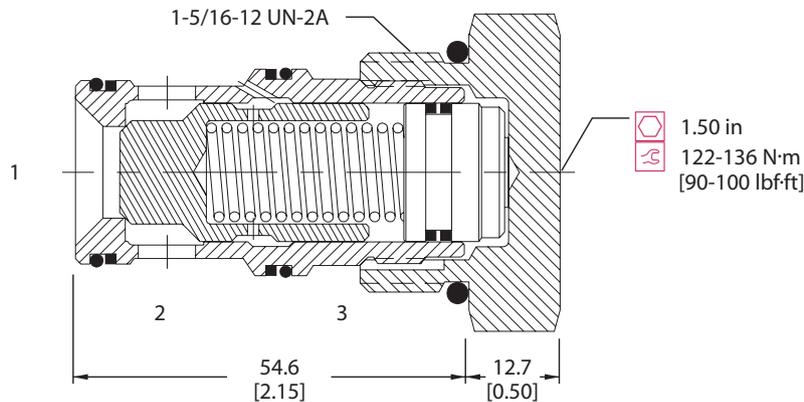

ORDERING INFORMATION

CP462-1 - B - 16S - 065 - 0

Seal Option

Code	Seal Material	Seal kit
B	Buna	120033
V	Viton	120034

Piston Seals

Code	
0	No seals
S	Seals Included

Housings & Ports	Housing P/N
0: Cartridge Only	No Housing
6B: 3/4 BSP, AL	CP16-3S-6B/2B
8B: 1 BSP, AL	CP16-3S-8B/2B
12S: #12 SAE, AL	CP16-3S-12S/4S
16S: #16 SAE, AL	CP16-3S-16S/4S


Other Housings available

Crack Pressure		
Code	bar	[psi]
065	4.48	[65]

OPERATION


This is a dual pilot operated check valve, which uses two CV10-NP check valves.

Schematic



SPECIFICATIONS

Theoretical performance

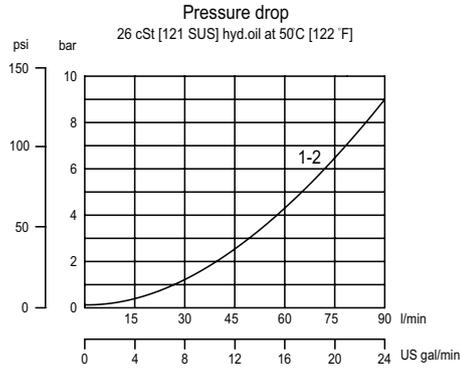


Specifications

Rated pressure	210 bar [3000 psi]
Rated flow at 7 bar [100 psi]	80 l/min [21.1 US gal/min]
Leakage	6 drops/min @ Rated pressure
Weight	0.67 kg [1.48 lb]
Pilot ratio	4:1
Cavity	none

Note: A piston seal requires a 4.5 bar [65 psi] or greater return spring.

DIMENSIONS

mm [in]

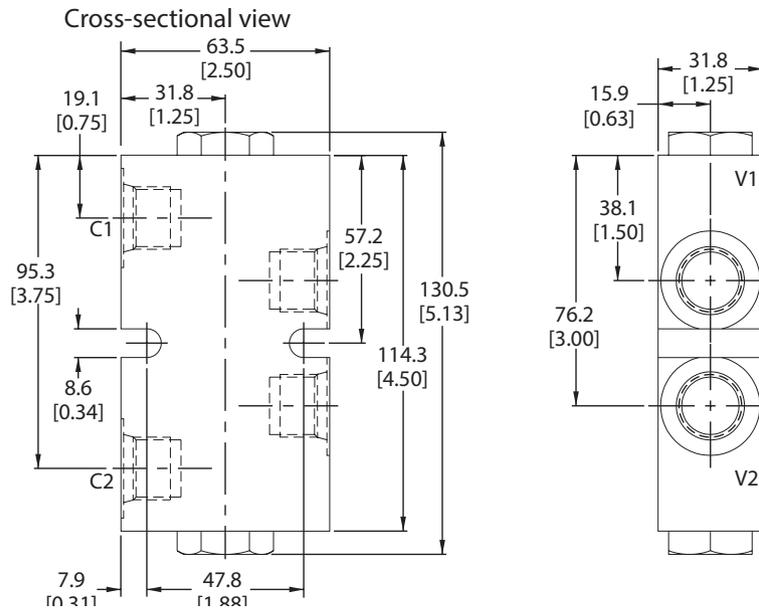

ORDERING INFORMATION

CP410 - 1 - B - 8S - 0 - 065

Seals

	Seal kit	W/ piston seals
B = Buna-N	120072	120176
V = Viton	120161	120177

Housing and ports

	Housing P/N
6S = Aluminum, #6 SAE	220099
8S = Aluminum, #8 SAE	220100
3B = Al, 3/8 BSP	221794
4B = Al, 1/2 BSP	221652

Crack Pressure

	bar	[psi]
065	= 4.50	[65]

Piston seals

0	= No seals
S	= Seals included

